



SCHA Sewer Cleaning Thermoplastic Hose

Section A
Hose

Hydraulic Hose A1
Metallic Hose A2
Thermoplastic A3

R7 HOSE
R7 TWIN HOSE
R7 TWIN - 1 WIRE BRAID HOSE
R8 HOSE
R8 NON CONDUCTIVE HOSE
PAINT SPRAY HOSE

SEWER CLEANING HOSE

MINI TEST \ MICRO BORE HOSE

Industrial Hose A4
Hose Protection A5

Section B
Hose Fittings

Section C
Quick Release Couplers

Section D
Adaptors

Section E
Steel Tube & Fittings

Section F
Brass Fittings

Section G
Components

Section H
Machinery

SEWER CLEANING HOSE

HOSE CONSTRUCTION

INNER TUBE
Polyethylene

REINFORCEMENT
One or Two Braids of Synthetic Fiber


COVER
Weather Resistant Polyurethane

TEMPERATURE RANGE
(MEDIUM) -40°C to +60°C

APPLICATION
Standard Sewer Cleaning Vehicles & Applications

SAFETY FACTOR
2.5:1

HOSE BRAND

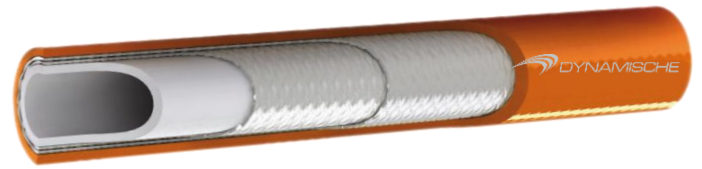

BRANDING

DYNAMISCHE – SEWER CLEANING – <SIZE INCH> – <SIZE DN> – WP <WP BAR> BAR BP <BP BAR> BAR

Part No.	Hose Size		I.D.	O.D.	Working Press		Burst Press		Bend Rad	Weight
	mm	inch			bar	psi	bar	psi		
SCHA-08	12	1/2	6.5	12	175	2500	438	6250	100	0.23
SCHA-10	16	5/8	9.7	16.5	175	2500	438	6250	115	0.29
SCHA-12	20	3/4	13	20.2	175	2500	438	6250	125	0.33
SCHA-16	25	1	19.5	28	175	2500	438	6250	160	0.48

Other Sizes Available on request

Supplied as a complete 120mtr assembly complete with NPT Male fittings on both ends