


D32 D32 Crimping Machine

DYNAMISCHE


DYNAMISCHE
CRIMPING MACHINES



D32 HYDRAULIC CRIMPING MACHINE


AVAILABLE IN 380V AND 220V
STANDARD WITH 13 SETS OF DIES

Overall Dimensions

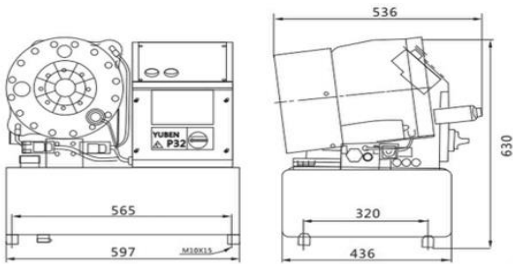

Technical Specification

		3 Phase	2 Phase
		380v	220v
Max Hose Size	in	2" 4SH	2" 4SH
Crimping Range Θ (mm)	mm	4...87	4...87
Max Opening	mm	33	33
Pump	L/Min	12	2.8
Max Pressure	bar	280	280
Crimping Force	KN	2000	2000
Theoretical Production Capacity	per hour	850	250
Sound pressure Level	db(A)	71	71
Protection Class		IP 54	IP 54
Closing speed of master dies	mm/s	2.7	0.6
Nett Weight Excl. Oil	kg	141	141

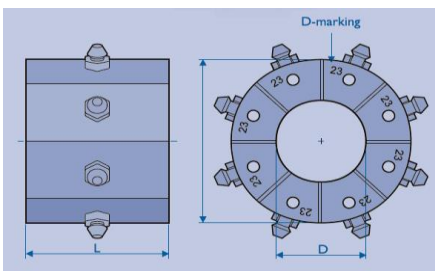

Crimping Range	Crimping Range		Crimping Range		L
	D	L	D	L	
**10.0 - 12.0	10	55	39.0 - 45.0	39	75
**12.0 - 14.0	12	55	45.0 - 51.0	45	90
14.0 - 16.0	14	55	51.0 - 57.0	51	90
16.0 - 19.0	16	55	57.0 - 63.0	57	100
19.0 - 22.0	19	55	63.0 - 69.0	63	110
22.0 - 26.0	22	70	69.0 - 75.0	69	110
26.0 - 30.0	26	70	**74.0 - 80.0	74	110
30.0 - 34.0	30	70	**78.0 - 87.0	78	110
34.0 - 39.0	34	75			

**Available on request



- Section A Hose
- Section B Hose Fittings
- Section C Quick release Couplers
- Section D Adaptors
- Section E Steel Tube & Fittings
- Section F Brass Fittings
- Section G Components
- Section H Machinery
- Crimpers H01
 - D20 CRIMPING MACHINE
 - D32 CRIMPING MACHINE**
 - D16 HAND CRIMPER
 - D20 HAND CRIMPER

